


DISTANCE:42 FEET RATIO: VOLUME: 24.6 mL
10.36:1 DROP BRUSH:34 FEET FORWARD: 16.41 mL
TANKS:TERRAIN & ICE REVERSE: 8.19 mL
PUMP: MULTI

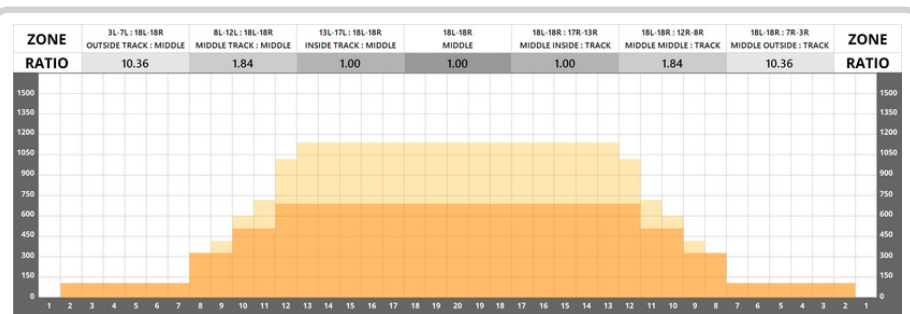

FORWARD LOADS DATA

#	START	STOP	LOADS	MICS	SPEED	BUFF	TANK	DISTANCE	T.OIL
1	2L	2R	2	55	18	3	A - Terrain	0 → 3	4,070
2	8L	8R	4	55	18	3	A - Terrain	3 → 13	5,500
3	10L	10R	4	45	18	3	A - Terrain	13 → 23	3,780
4	12L	12R	4	45	18	3	A - Terrain	23 → 33	3,060
5	2L	2R	0	45	22	3	A - Terrain	33 → 34	0
6	2L	2R	0	45	30	3	A - Terrain	34 → 42	0

REVERSE LOADS DATA

#	START	STOP	LOADS	MICS	SPEED	BUFF	TANK	DISTANCE	T.OIL
1	2L	2R	0	40	30	3	B - Ice	34 → 29	0
2	13L	13R	3	40	18	3	B - Ice	29 → 21	1,800
3	12L	12R	3	40	18	3	B - Ice	21 → 14	2,040
4	11L	11R	3	40	14	3	B - Ice	14 → 8	2,280
5	9L	9R	2	45	14	3	B - Ice	8 → 4	2,070
6	2L	2R	0	45	14	3	B - Ice	4 → 0	0

THIS PATTERN IS DESIGNED FOR:

VARIABLE MICROLITER STREAMS | DUAL CONDITIONING TANKS | REVERSE DROP BRUSH

This pattern may require adjustments if using a lane machine that does not have these features

